

## SL 83

Art. No. 2278 – 4 Ω



### Technische Daten / Technical Data

|                                                             |                        |
|-------------------------------------------------------------|------------------------|
| Nennbelastbarkeit<br>Rated power                            | 8 W                    |
| Impedanz<br>Impedance                                       | 4 Ω                    |
| Mittlerer Schalldruckpegel<br>Mean sound pressure level     | 88 dB (1 W/1 m)        |
| Übertragungsbereich (-10 dB)<br>Frequency response (-10 dB) | 130–16.000 Hz          |
| Resonanzfrequenz<br>Resonant frequency                      | 250 Hz                 |
| Obere Polplattenhöhe<br>Height of front pole-plate          | 3 mm                   |
| Schwingspuldurchmesser<br>Voice coil diameter               | 16,5 mm                |
| Wickelhöhe<br>Height of winding                             | 4,6 mm                 |
| Schallwandöffnung<br>Cut-out diameter                       | 72 mm                  |
| Anschluss<br>Terminal                                       | 4,8 x 0,8/2,8 x 0,8 mm |
| Gewicht netto<br>Net weight                                 | 252 g                  |

**8 cm (3.3") Breitbandlautsprecher** mit Kunststoffmembran und Ferritmagnet optimiert für anspruchsvolle Umweltbedingungen.


#### Anwendungsmöglichkeiten:

- AVAS Systeme
- Schallzeilen

**8 cm (3.3") full-range speaker** with plastic cone and ferrite magnet optimized for demanding environmental conditions.

#### Typical applications:

- AVAS Systems
- Column speakers

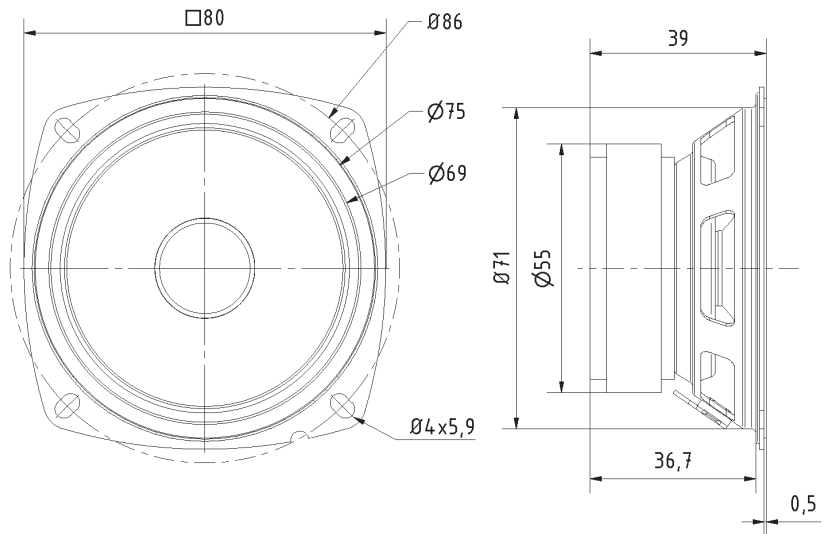

Directivity pattern

